

# isolcork®

## RUBBER TOP

Sprayed waterproof coating based on recycled rubber particles for roofs and walls.



Isolcork Sprayed Rubber combines waterproofing and recycling. It is formulated with 100% recycled rubber from used tires. It allows to form a continuous membrane in a fast and safe execution.



Waterproof roofs and walls



Waterproofing pipelines  
(corrosion)



Waterproofs pipeline  
start-up



Self-extinguishing under  
the action of fire



Continuous waterproofing,  
without joints or screws.

**Product Warranty:**  
10 Years

**Registered:**  
AIPA-6188A - U.S.  
Patent and Trademark  
Office.

isolcork®



Note: Check our latest technical information in our website

[www.isolcork.com](http://www.isolcork.com)

# ISOLCORK®

## RUBBER TOP

Isolcork Sprayed Rubber coating has a nice finish in different colors, which offers efficient and continuous waterproofing.

## ADVANTAGES

- ✓ Waterproof
- ✓ Easy and fast application
- ✓ Without joints
- ✓ Good adhesion
- ✓ Resistant to high and low temperatures
- ✓ High resistance to weathering, UV rays and sea salt
- ✓ Self extinguishing under the action of fire
- ✓ Product with recycled raw materials

## PRODUCT DESCRIPTION

Sprayable

Granulate

Texture

Multiple colors



Range:

64.58 to 75.34 Sq.Ft.  
per Bucket

## INSTRUCTIONS FOR USE

It is applied mechanically, by a spray gun (compressed air and/or industrial compressor). The application must be in two coats minimum.

**Dry to touch:** 30 minutes (ambient temp. 68°F)

**Total drying:** 12-24 hours (T = 68°F, U.R. 40%)

**Application temperature:** + 41°F / + 95° F

**Thickness:** 0.08 to 0.10 in 2 coats

If applied with a conventional compressor, it covers up to 1,615 Sq. Ft. of surface in one day.

If applied with an industrial machine, it covers up to 3,229 Sq. Ft. of surface in one day.

## RECOMMENDATIONS

The surface must be clean, dust free and dry.

The product should be stored in well ventilated areas, protected from sunlight, water and frost, at temperatures between +41° F and +86° F.


Storage time 12 months.

TRIALS	RESULTS	NORMATIVE
--------	---------	-----------

Attribute / Waterproof

Waterproofing

ASTM-D7832

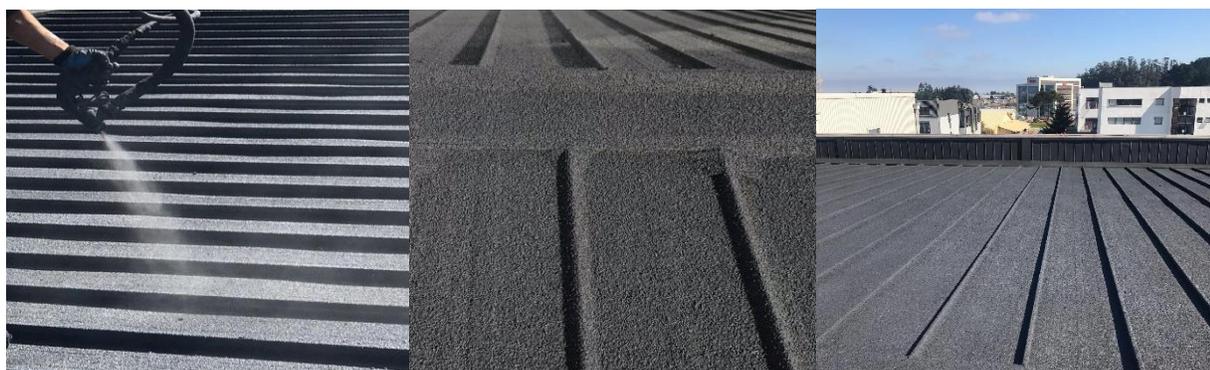

## USA OFFICES

### ISOLCORK TEXAS

1801 Main St., Suite 1300  
Houston, TX 77002  
Phone: +1(832) 606-5837  
Email: texas@isolcork.com

### ISOLCORK ARIZONA

5541 Lamplighter Dr. Tucson,  
85746, Tucson, AZ  
Phone : +1(520) 867-5400  
Email : arizona@isolcork.com

## ISOLCORK USA Inc.

1201 North Market Street  
Willington, New Castle, DE  
Email: contact@isolcork.com



[www.isolcork.com](http://www.isolcork.com)